
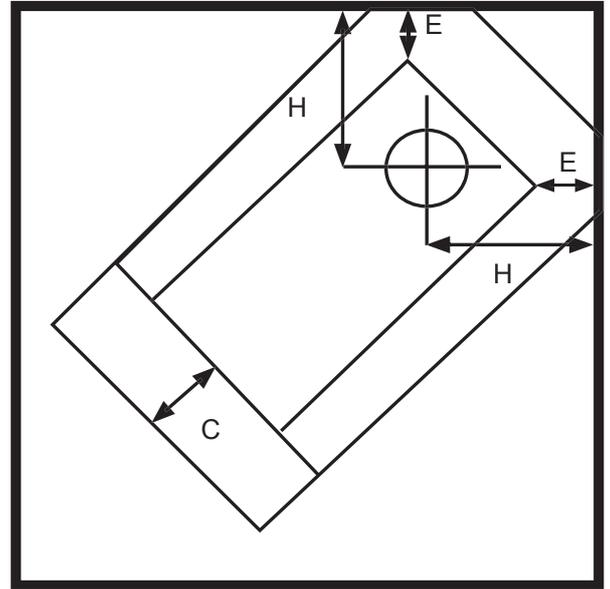


THE BUTLER MULTI 3/05

Dry Model

Installation Clearances




AS/NZ Standard 2918:2001

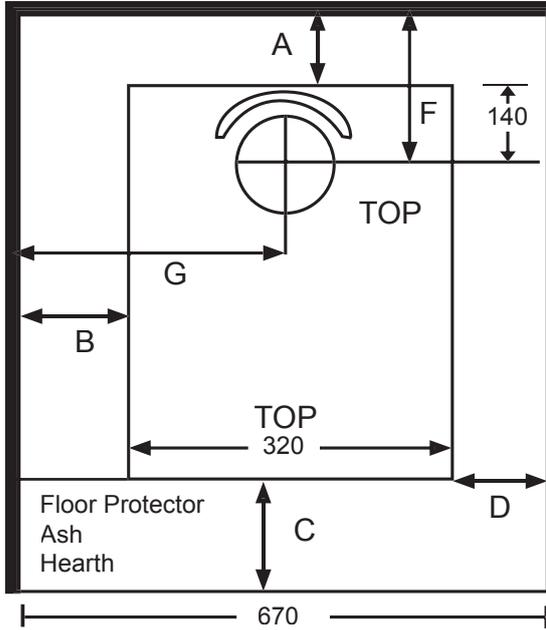

Estimated Heat Output 14 kw


Minimum clearance to Combustible Surfaces	A	B	C	D	E	F	G	H
With double stainless steel Flue shield to unprotected wall	50mm	225mm	300mm	175mm	25mm	190mm	385mm	235mm
As above 12mm Promina board spaced 25mm off wall	37mm	66mm	Ash Hearth/Floor Protection must extend under the stove and forward 300mm extending 200mm either side of the door opening					
As above with sheet metal any type 0.5mm or thicker spaced 25mm off the wall.	25mm	68mm						

Other screening materials are available and clearance factors can be calculated to the AS/NZS 2918:2001. Please ask your retailer or contact Wagener Stoves if you need further advice.

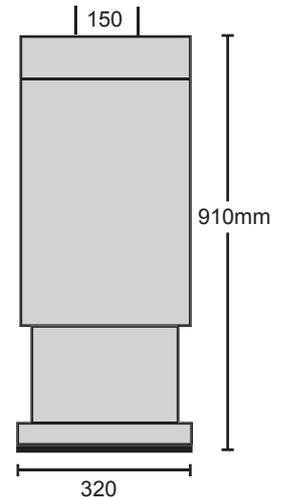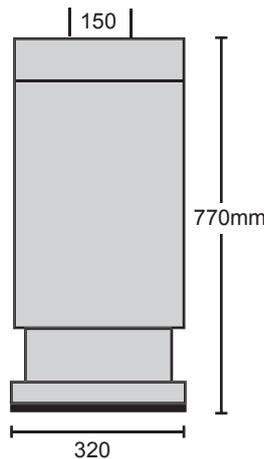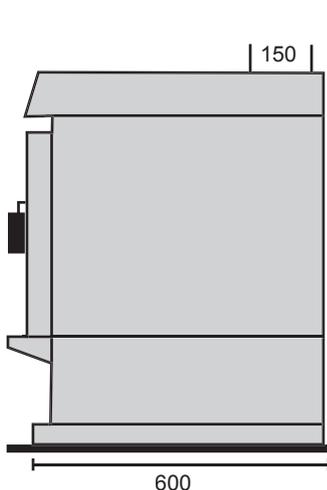

FLUE INSTALLATION 3/05

The Butler Multi uses a 150mm diameter flue. It is imperative that the connection between the flue and the flue spigot is sealed using a recommended flue sealant. If an offset bend is required it should be as steep as possible to enable ease of cleaning. Extra flue height may be required to compensate for lack of draw. **The performance of the Butler Multi depends more on the flue than on any other single component as it is the draw on the flue that drives the Butler Multi. We recommend 4.2metres of flue.**

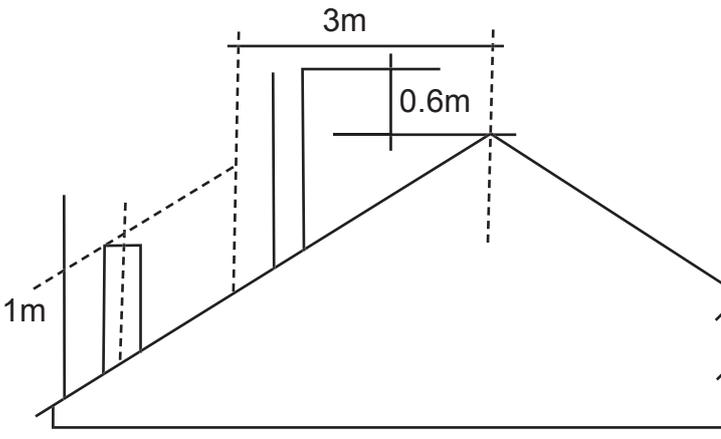

The top of the flue system should be at least 1000mm above the roof or at least 600mm higher than any obstacle or ridge within 3 metres of the flue. A total minimum vertical flue height ABOVE the Butler Multi of 4.2 metres is normally required for adequate draft. Joints between sections of the flue pipes are push fitted so that the upper section enters the bottom section and must be SEALED using a flue sealant. Each section should be secured to prevent separation using 3 stainless steel self tapping screws or pop rivets. Only flue systems which comply with the AS/NZS 2918-2001 should be used. Please follow flue manufacturers instructions on page 5 "150mm Free Standing Woodfire Flue Kit Installation" Instructions'. ***NB. Bird netting is available***

